

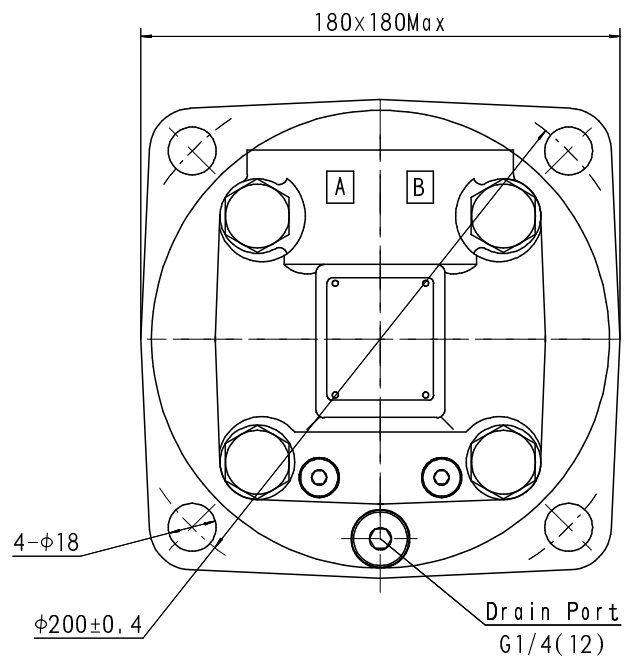
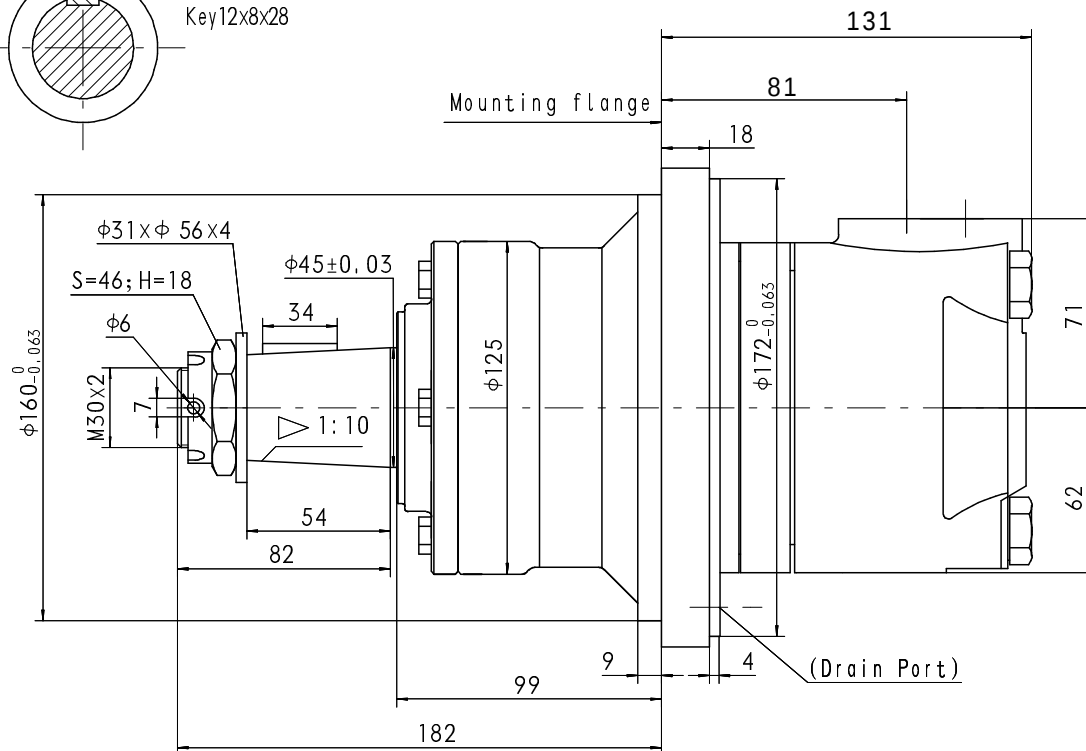




K view

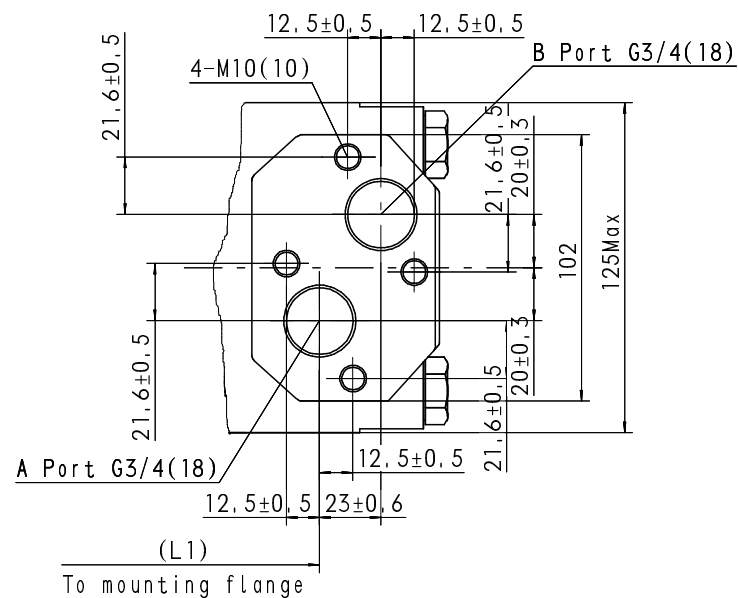

MAIN SPECIFICATION

Type BMT-200-W-T-D-B

Geometric displacement(cc/rev)201.4

Max speed (rpm): cont. 625

int. 750

Max torque (Nm): cont. 590

int. 710

peak.838

Max output (kw): cont. 34.9

int. 40

Max pressure drop (MPa) cont. 20

int. 24

peak 28

Max flow(L/min): cont. 125

int. 150

Max Inlet pressure (MPa) cont. 21

int. 25

peak 30

Direction of shaft rotation: Standard

When facing shaft end of motor,shaft torotate:

Clock wise when port "A" is pressurized

Counter-clockwise when port "B" is pressurized

Note:Nut tightening torque: 500±10Nm

B:Black

HGB S.R.L.

BMT Assembly drawing

BMT-200-W-T-D-B