


# 1GP20012293

## 2XP-A-060-D-EUR-B-N-10-O-N13N13


**2XP - A - 060 - D - EUR - B - N - 10 - O - N13N13**

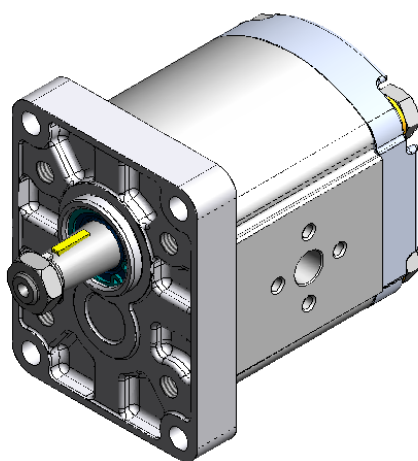


**Corpo in alluminio**

| Tipo        | Cilindrata | P1<br>Press. massima<br>continua | P2<br>Press. massima<br>intermittente | P3<br>Press. massima<br>di picco | Velocità di rotazione |            |
|-------------|------------|----------------------------------|---------------------------------------|----------------------------------|-----------------------|------------|
|             | cm³/giro   | bar                              | bar                                   | bar                              | max<br>rpm            | min<br>rpm |
| 2XP/2XM 040 | 4.1        | 250                              | 270                                   | 290                              | 4000                  | 500        |
| 2XP/2XM 060 | 6.1        | 250                              | 270                                   | 290                              | 4000                  | 500        |
| 2XP/2XM 080 | 8.7        | 250                              | 270                                   | 290                              | 3500                  | 500        |
| 2XP/2XM 110 | 11.2       | 250                              | 270                                   | 290                              | 3500                  | 500        |
| 2XP/2XM 140 | 14.2       | 250                              | 270                                   | 290                              | 3500                  | 500        |
| 2XP/2XM 160 | 16.8       | 230                              | 240                                   | 250                              | 3500                  | 500        |
| 2XP/2XM 190 | 19.8       | 210                              | 220                                   | 230                              | 3500                  | 500        |
| 2XP/2XM 220 | 22.9       | 190                              | 200                                   | 210                              | 3000                  | 500        |
| 2XP/2XM 260 | 26.4       | 170                              | 180                                   | 190                              | 3000                  | 500        |
| 2XP/2XM 290 | 29.1       | 150                              | 160                                   | 170                              | 2500                  | 500        |
| 2XP/2XM 310 | 31.5       | 130                              | 140                                   | 150                              | 2500                  | 500        |


### Pompe 2XP

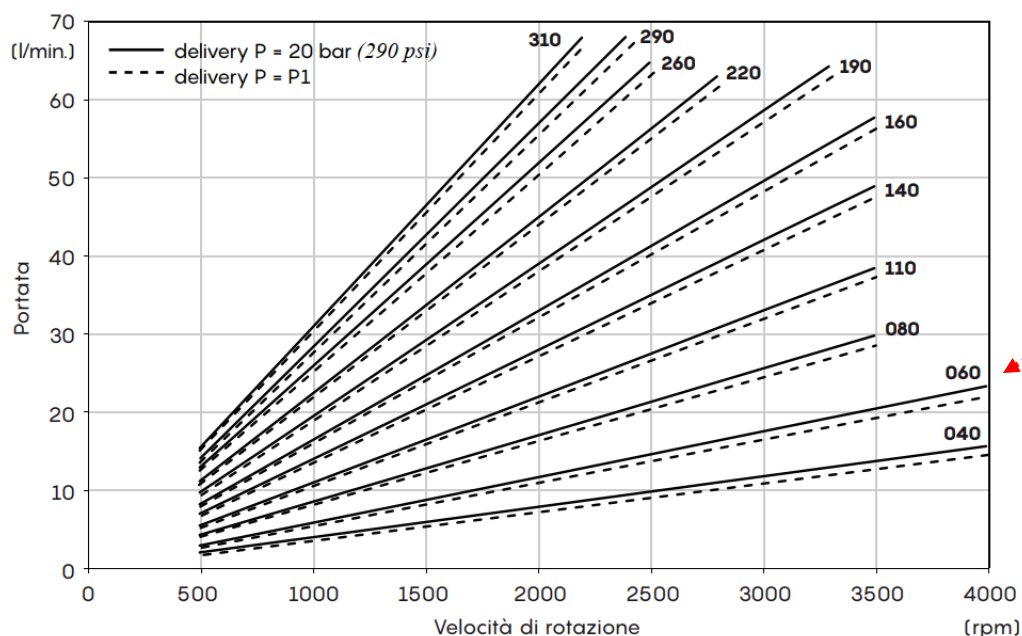


### 2XP 060

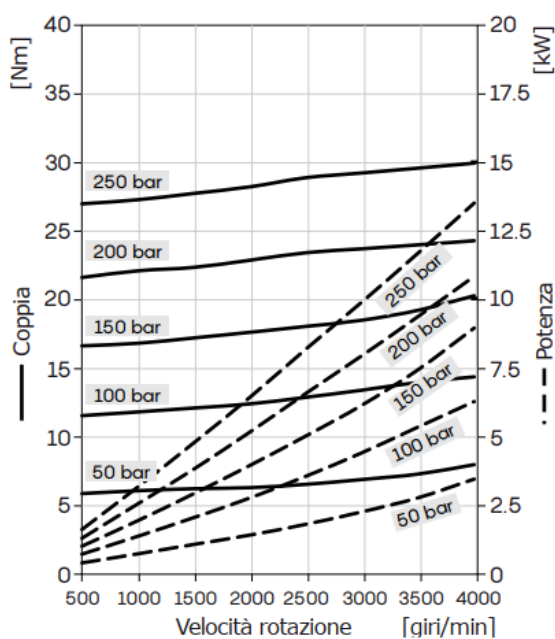

2XP - A - 060 - **D** - EUR - B - N - 10 - O - N13N13


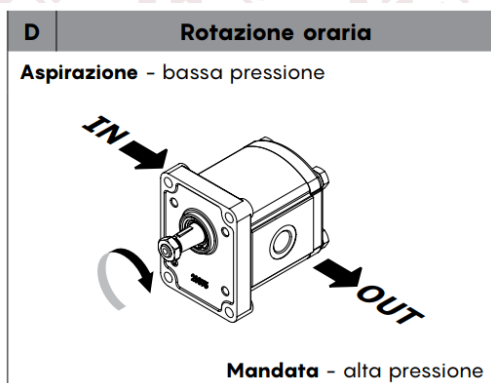


Unidirezionale



2XP - A - 060 - D - **EUR** - B - N - 10 - O - N13N13

Con paraoli: kit flangia standard  
Esempio flangia EUR

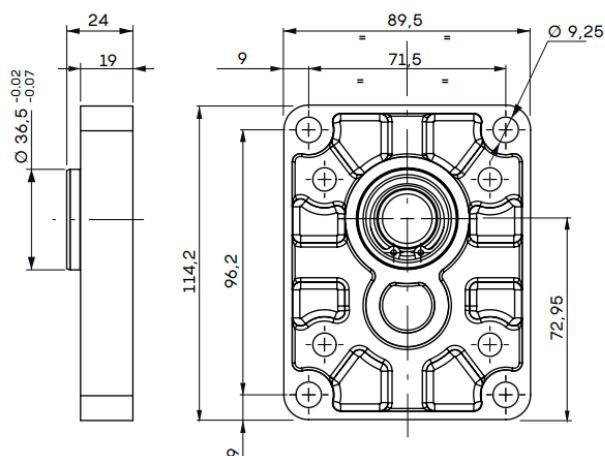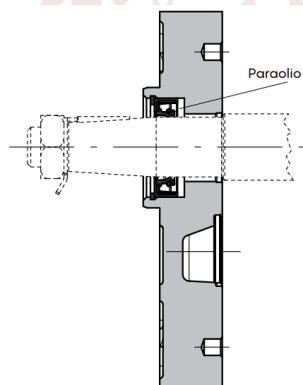


2XP - A - 060 - D - EUR - **B** - N - 10 - O - N13N13

Anello tenuta fino a 3 BAR a 1000 giri/min  
(massima pressione sulla bocca di scarico/aspirazione)


2XP-A-060-D-EUR-B-N-10-O-N13N13

Guarnizioni NBR

2XP-A-060-D-EUR-B-N-10-O-N13N13

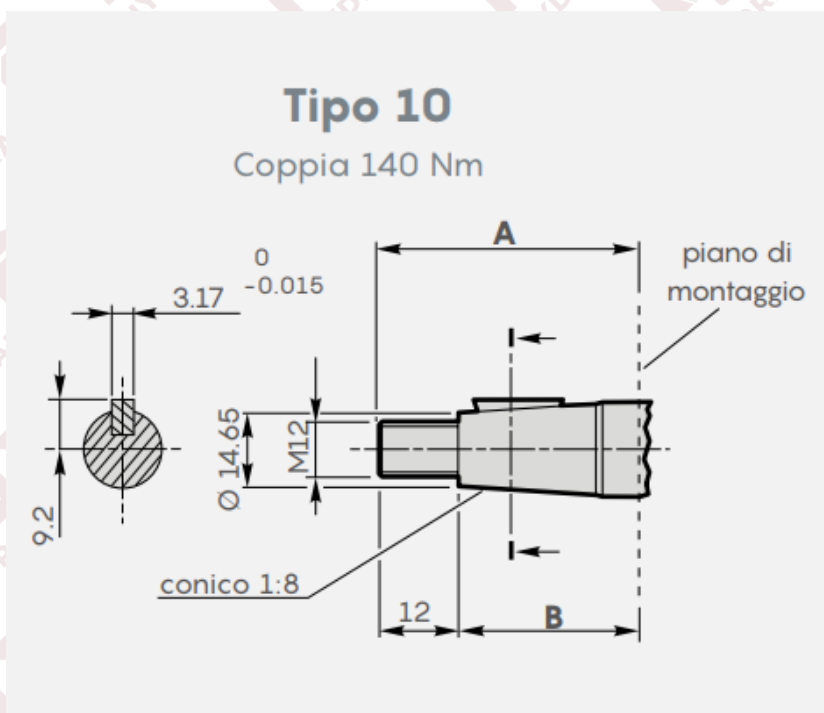

2XP-A-060-D-EUR-B-N-10-O-N13N13

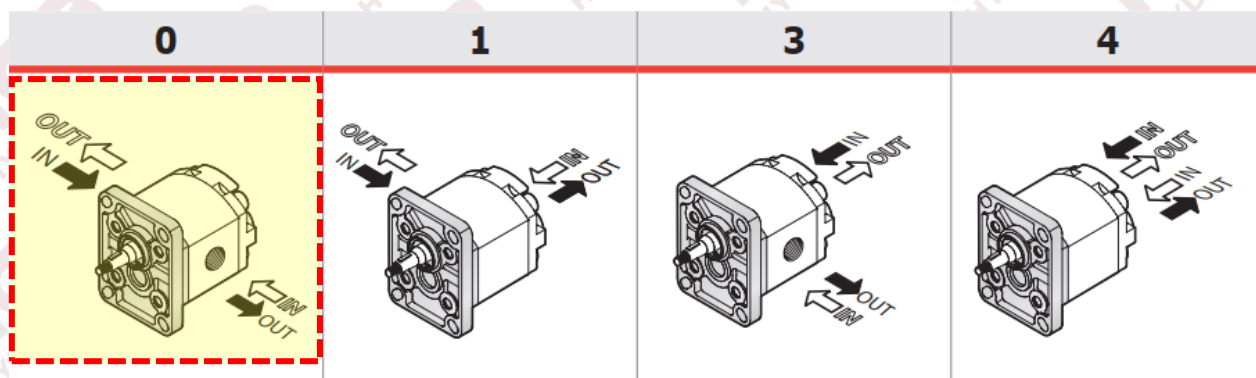


2XP - A - 060 - D - EUR - B - N - 10 - 0 - **N13N13**

**Flangiatura tipo N (EUROPEA)**



| Cilindrata | Bocche laterali - Drenaggio posteriore |     |        |             |     |        |
|------------|----------------------------------------|-----|--------|-------------|-----|--------|
|            | 2XP / 2XM                              |     |        | 2XPW / 2XMW |     |        |
|            | IN                                     | OUT | Dren.  | IN          | OUT | Dren.  |
| 040        | N13                                    | N13 | G14/U6 | -           | -   | -      |
| 060        | N13                                    | N13 | G14/U6 | -           | -   | -      |
| 080        | N13                                    | N13 | G14/U6 | -           | -   | -      |
| 110        | N19                                    | N13 | G14/U6 | N19         | N13 | G14/U6 |
| 140        | N19                                    | N13 | G14/U6 | N19         | N13 | G14/U6 |
| 160        | N19                                    | N13 | G14/U6 | N19         | N13 | G14/U6 |
| 190        | N19                                    | N13 | G14/U6 | N19         | N13 | G14/U6 |
| 220        | N19                                    | N13 | G14/U6 | N19         | N13 | G14/U6 |
| 260        | N19                                    | N13 | G14/U6 | N19         | N13 | G14/U6 |
| 290        | N19                                    | N13 | G14/U6 | N19         | N13 | G14/U6 |
| 310        | N19                                    | N13 | G14/U6 | N19         | N13 | G14/U6 |

| Dimensione bocca |       |       |    |    |    |     |
|------------------|-------|-------|----|----|----|-----|
|                  | A (Ø) | B (Ø) | C  | D  | IN | OUT |
|                  | mm    | mm    |    | mm | Nm | Nm  |
| N13              | 13    | 30    | M6 | 15 | 8  | 8   |
| N19              | 19    | 40    | M8 | 15 | 15 | 15  |

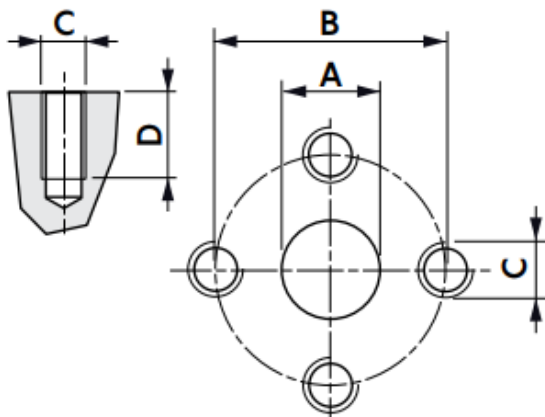

## Dimensioni totali

Flangia tipo EUR

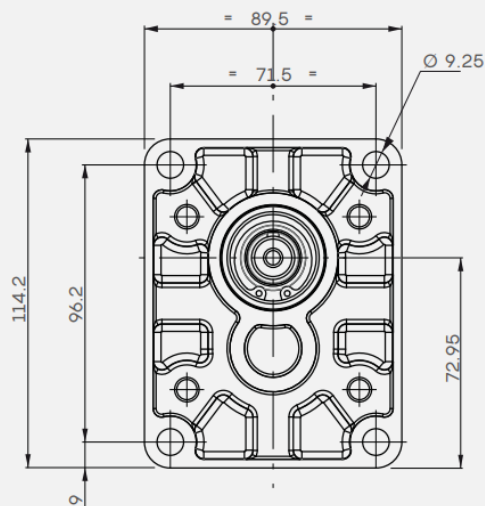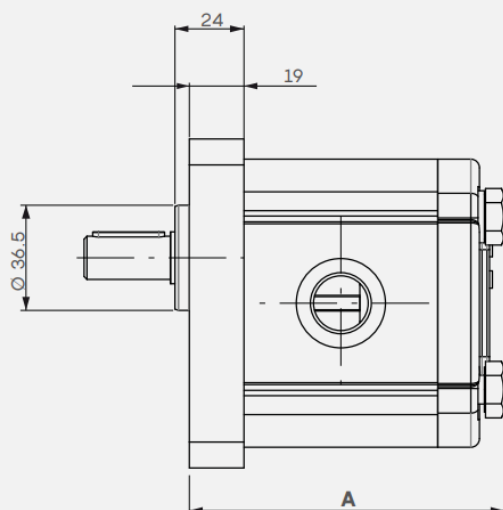

| Gruppo<br>2XP | A<br>mm |
|---------------|---------|
| 040           | 92.9    |
| 060           | 96.2    |
| 080           | 100.4   |
| 110           | 104.5   |
| 140           | 109.5   |
| 160           | 113.7   |
| 190           | 118.7   |
| 220           | 123.7   |
| 260           | 129.5   |
| 290           | 133.9   |
| 310           | 137.9   |