


1GP20012835

2XP-A-060-D-SAEA-B-N-14-O-N13N13


2XP - A - 060 - D - SAEA - B - N - 14 - O - N13N13

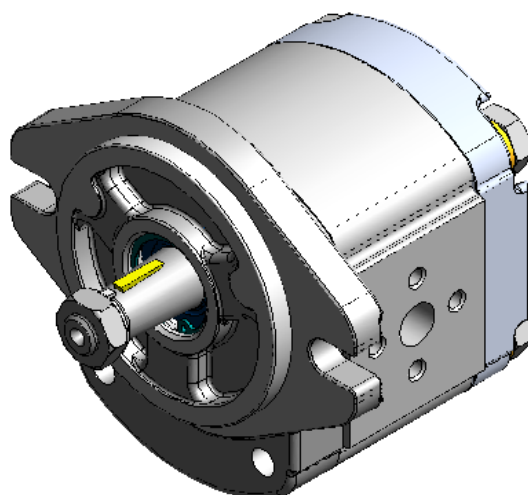


Corpo in alluminio

Tipo	Cilindrata cm³/giro	P1 Press. massima continua bar	P2 Press. massima intermittente bar	P3 Press. massima di picco bar	Velocità di rotazione	
					max rpm	min rpm
2XP/2XM 040	4.1	250	270	290	4000	500
2XP/2XM 060	6.1	250	270	290	4000	500
2XP/2XM 080	8.7	250	270	290	3500	500
2XP/2XM 110	11.2	250	270	290	3500	500
2XP/2XM 140	14.2	250	270	290	3500	500
2XP/2XM 160	16.8	230	240	250	3500	500
2XP/2XM 190	19.8	210	220	230	3500	500
2XP/2XM 220	22.9	190	200	210	3000	500
2XP/2XM 260	26.4	170	180	190	3000	500
2XP/2XM 290	29.1	150	160	170	2500	500
2XP/2XM 310	31.5	130	140	150	2500	500


Pompe 2XP

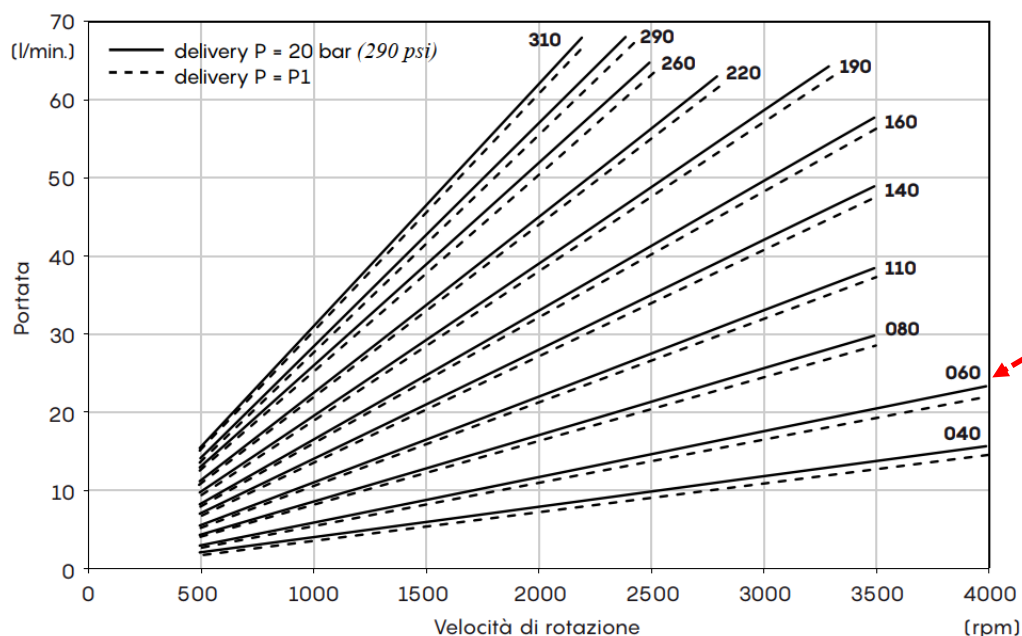

2XP 060

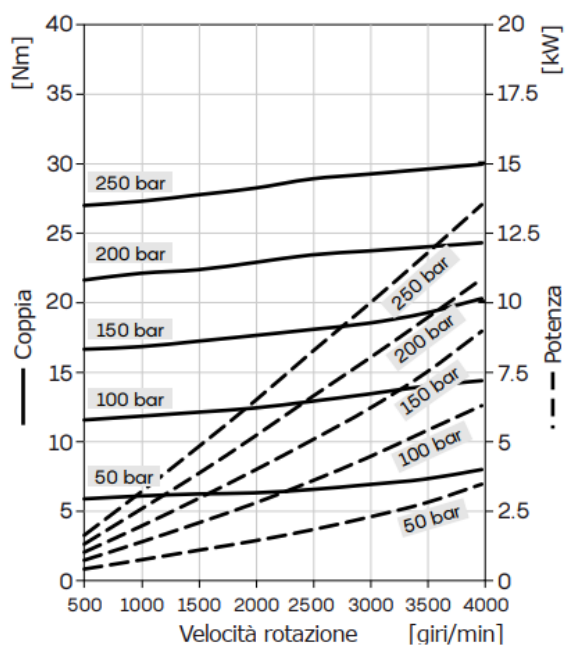


2XP - A - 060 - **D** - SAEA - B - N - 14 - O - N13N13

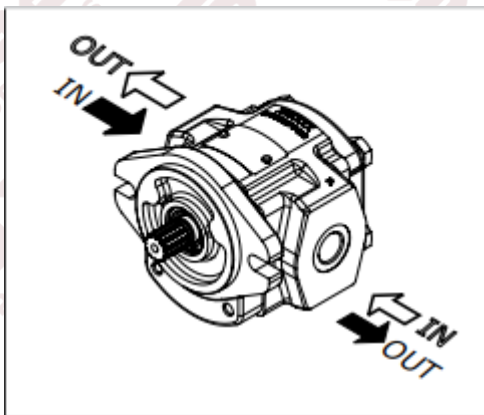


Rotazione oraria - **D**

Unidirezionale



2XP - A - 060 - D - **SAEA** - B - N - 14 - O - N13N13

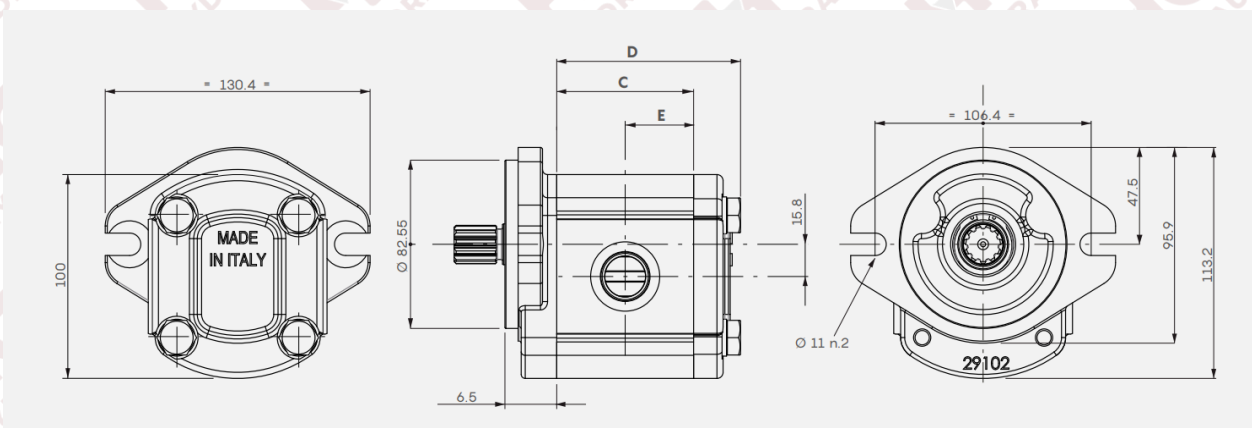


2XP - A - 060 - D - SAEA - **B** - N - 14 - O - N13N13

Anello tenuta fino a 3 BAR a 1000 giri/min
(massima pressione sulla bocca di scarico/aspirazione)


2XP - A - 060 - D - SAEA - B - **N** - 14 - 0 - N13N13

Guarnizioni NBR

2XP - A - 060 - D - SAEA - B - N - **14** - 0 - N13N13

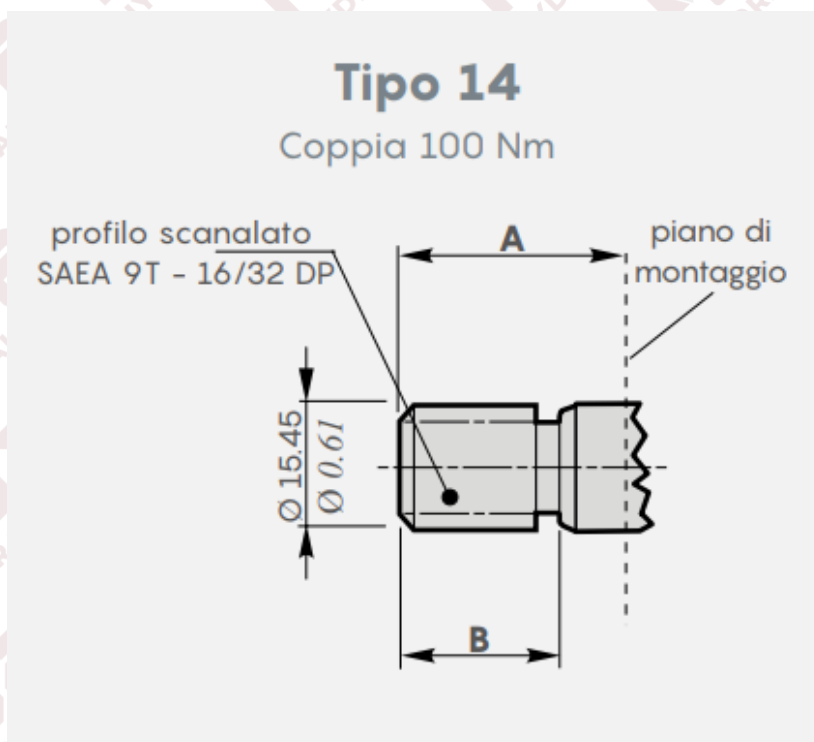

2XP - A - 060 - D - SAEA - B - N - 14 - **0** - N13N13

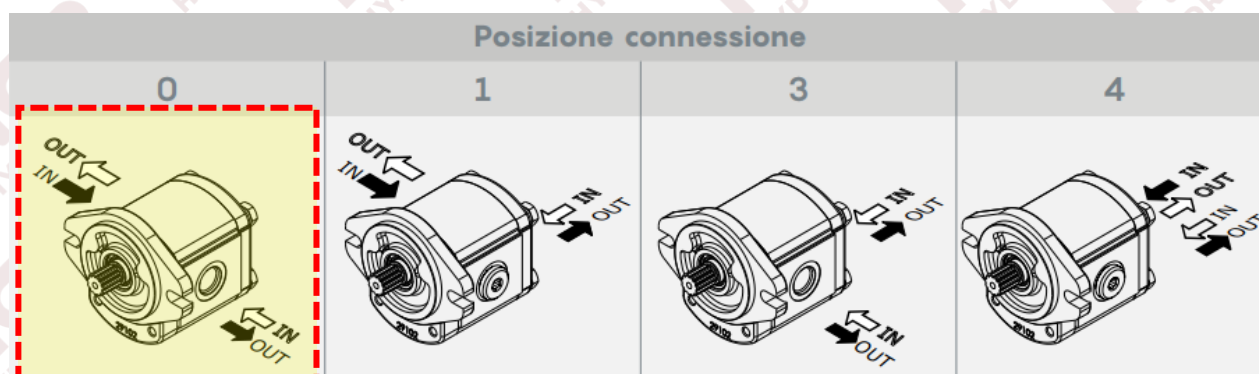


2XP - A - 060 - D - SAEA - B - N - 14 - 0 - **N13N13**

Flangiatura tipo N (EUROPEA)



Cilindrata	2XP / 2XM			2XPW / 2XMW		
	IN	OUT	Dren.	IN	OUT	Dren.
040	N13	N13	G14/U6	-	-	-
060	N13	N13	G14/U6	-	-	-
080	N13	N13	G14/U6	-	-	-
110	N19	N13	G14/U6	N19	N13	G14/U6
140	N19	N13	G14/U6	N19	N13	G14/U6
160	N19	N13	G14/U6	N19	N13	G14/U6
190	N19	N13	G14/U6	N19	N13	G14/U6
220	N19	N13	G14/U6	N19	N13	G14/U6
260	N19	N13	G14/U6	N19	N13	G14/U6
290	N19	N13	G14/U6	N19	N13	G14/U6
310	N19	N13	G14/U6	N19	N13	G14/U6

Dimensione bocca

	A (Ø)	B (Ø)	C	D	IN	OUT
	mm	mm		mm	Nm	Nm
N13	13	30	M6	15	8	8
N19	19	40	M8	15	15	15

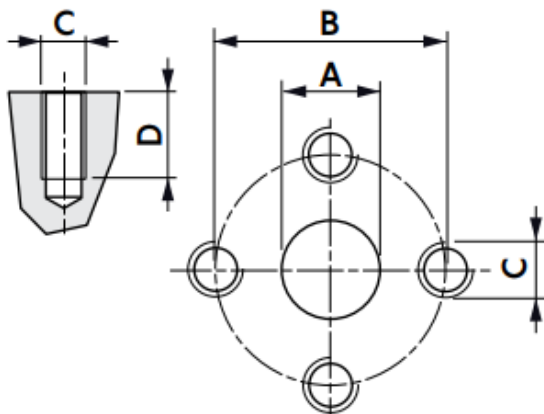

Dimensioni totali

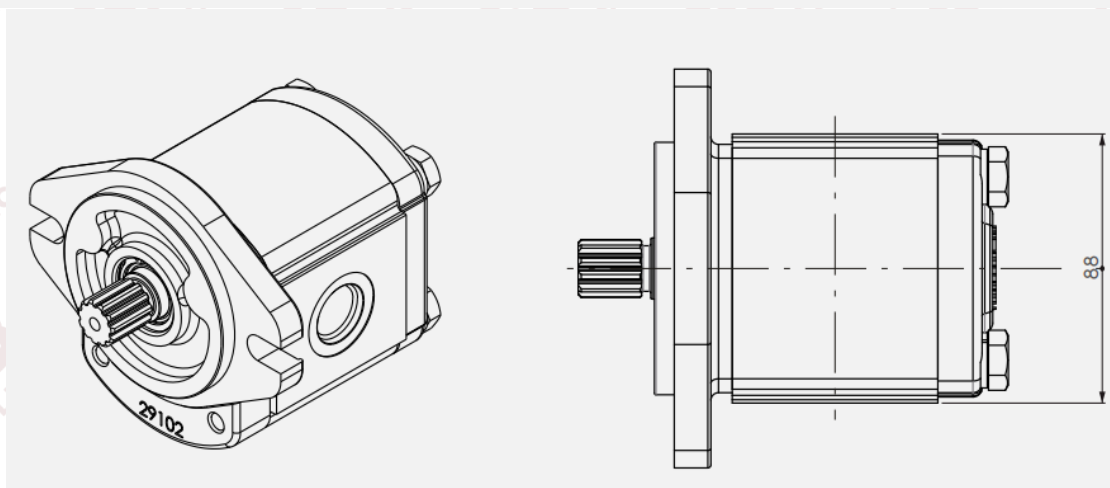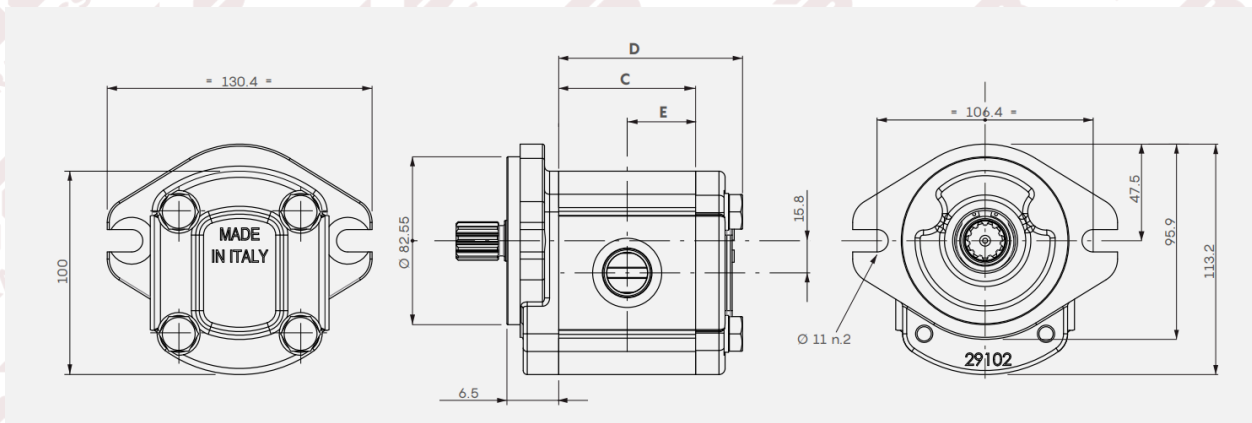

Gruppo 2XP	C mm	D mm	E mm
040	50.8	92.9	44.4
060	54.1	96.2	46.05
080	58.3	100.4	48.15
110	62.4	104.5	50.2
140	67.4	109.5	52.7
160	71.6	113.7	54.8
190	76.6	118.7	57.3
220	81.6	123.7	59.8
260	87.4	129.5	62.7
290	91.8	133.9	64.9
310	95.8	137.9	66.9