


# 1GP20012296

## 2XP-A-140-D-EUR-B-N-10-O-N19N13


**2XP - A - 140** - D - EUR - B - N - 10 - O - N19N13

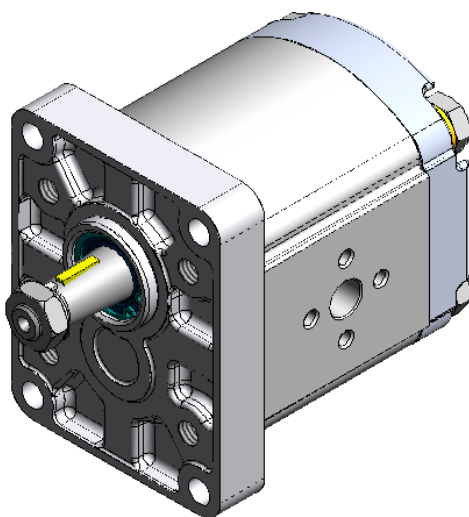


**Corpo in alluminio**

| Tipo               | Cilindrata<br>cm³/giro | P1<br>Press. massima<br>continua<br>bar | P2<br>Press. massima<br>intermittente<br>bar | P3<br>Press. massima<br>di picco<br>bar | Velocità di rotazione |            |
|--------------------|------------------------|-----------------------------------------|----------------------------------------------|-----------------------------------------|-----------------------|------------|
|                    |                        |                                         |                                              |                                         | max<br>rpm            | min<br>rpm |
| 2XP/2XM 040        | 4.1                    | 250                                     | 270                                          | 290                                     | 4000                  | 500        |
| 2XP/2XM 060        | 6.1                    | 250                                     | 270                                          | 290                                     | 4000                  | 500        |
| 2XP/2XM 080        | 8.7                    | 250                                     | 270                                          | 290                                     | 3500                  | 500        |
| 2XP/2XM 110        | 11.2                   | 250                                     | 270                                          | 290                                     | 3500                  | 500        |
| <b>2XP/2XM 140</b> | <b>14.2</b>            | <b>250</b>                              | <b>270</b>                                   | <b>290</b>                              | <b>3500</b>           | <b>500</b> |
| 2XP/2XM 160        | 16.8                   | 230                                     | 240                                          | 250                                     | 3500                  | 500        |
| 2XP/2XM 190        | 19.8                   | 210                                     | 220                                          | 230                                     | 3500                  | 500        |
| 2XP/2XM 220        | 22.9                   | 190                                     | 200                                          | 210                                     | 3000                  | 500        |
| 2XP/2XM 260        | 26.4                   | 170                                     | 180                                          | 190                                     | 3000                  | 500        |
| 2XP/2XM 290        | 29.1                   | 150                                     | 160                                          | 170                                     | 2500                  | 500        |
| 2XP/2XM 310        | 31.5                   | 130                                     | 140                                          | 150                                     | 2500                  | 500        |


### Pompe 2XP

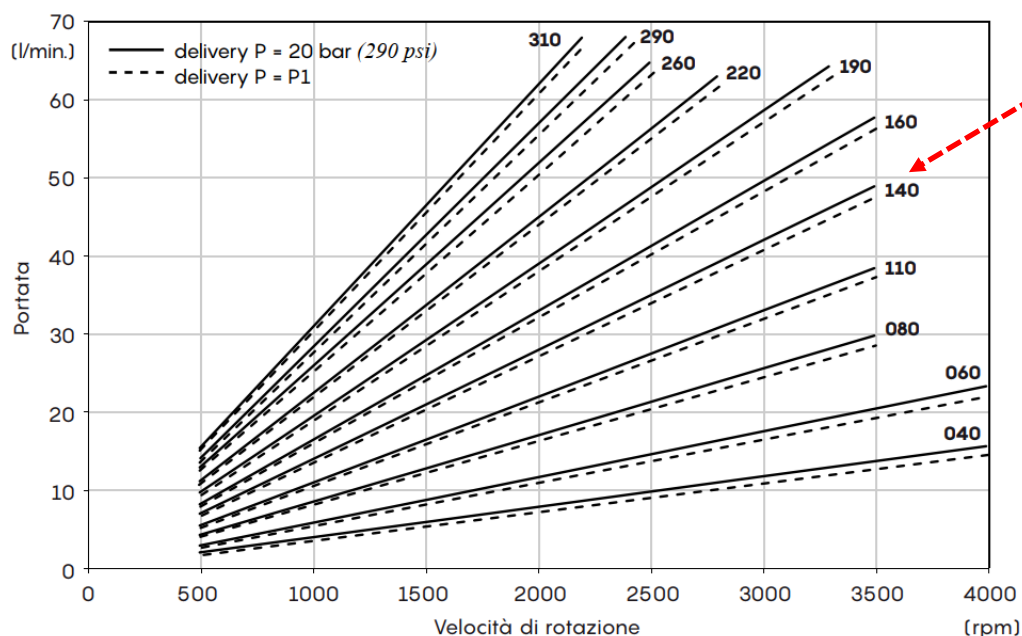


### 2XP 140

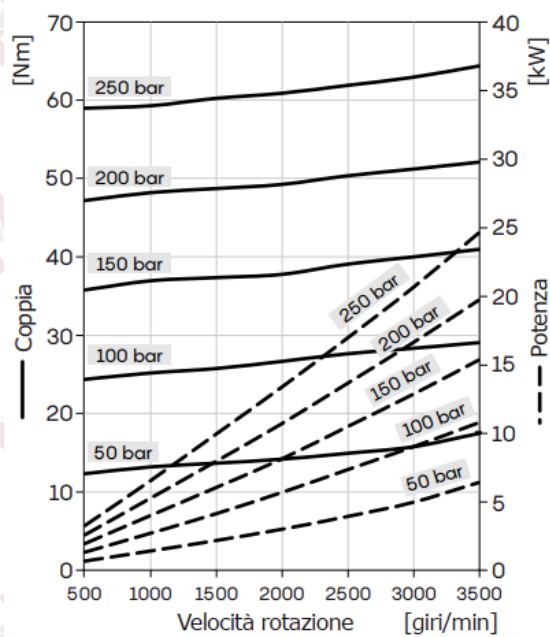

2XP-A-140-D-EUR-B-N-10-O-N19N13


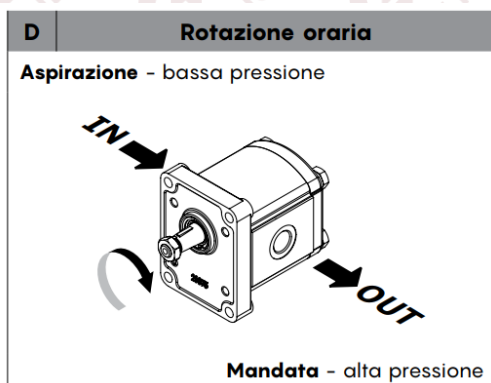


Unidirezionale



2XP-A-140-D-EUR-B-N-10-O-N19N13

Con paraoli: kit flangia standard  
Esempio flangia EUR

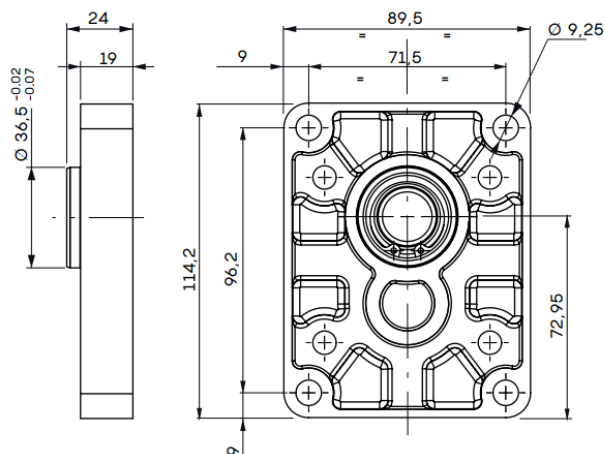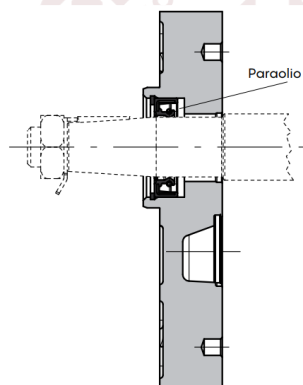

2XP-A-140-D-EUR-B-N-10-O-N19N13


Anello tenuta fino a 3 BAR a 1000 giri/min  
(massima pressione sulla bocca di scarico/aspirazione)




2XP-A-140-D-EUR-B-N-10-O-N19N13

Guarnizioni NBR

2XP-A-140-D-EUR-B-N-10-O-N19N13

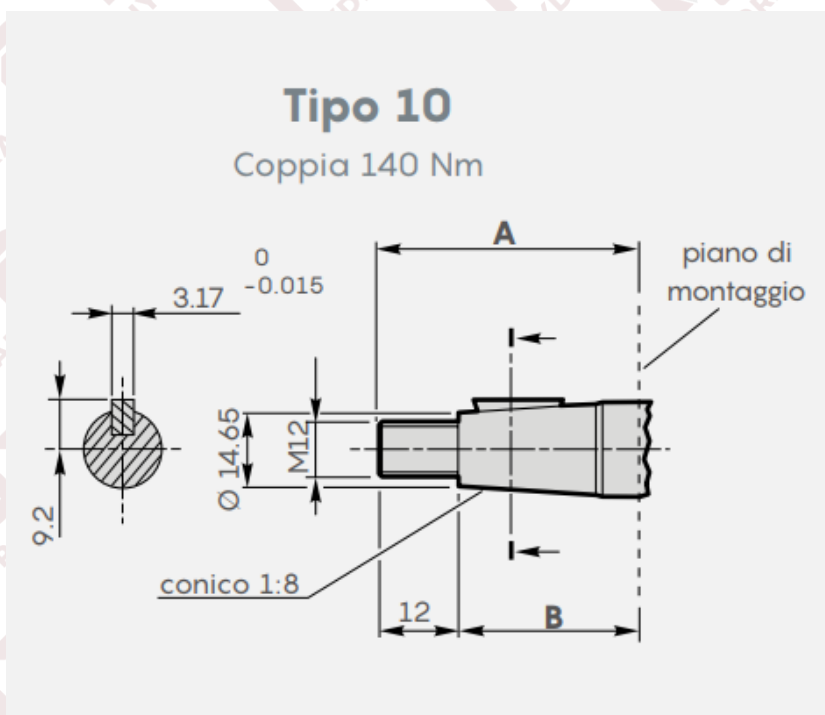

2XP-A-140-D-EUR-B-N-10-O-N19N13

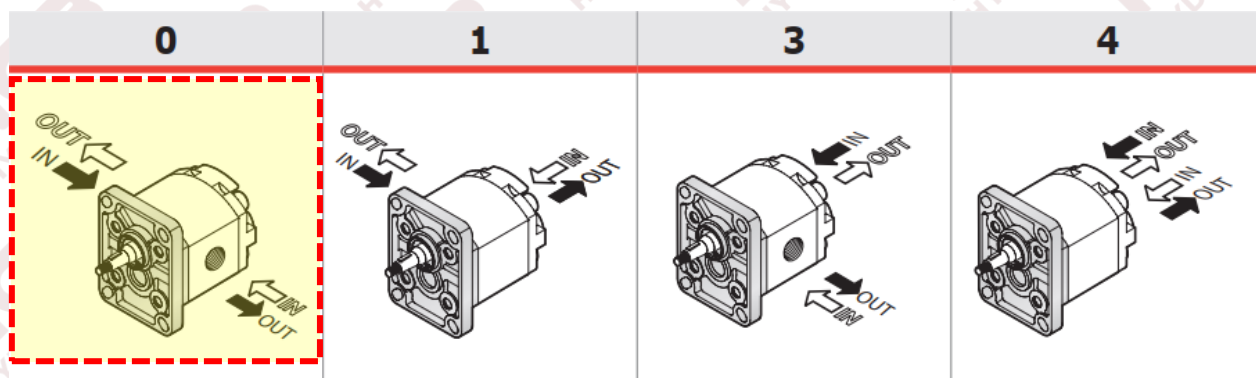


2XP-A-140-D-EUR-B-N-10-0 - **N19N13**

**Flangiatura tipo N (EUROPEA)**



| Cilindrata | 2XP / 2XM  |            |               | 2XPW / 2XMW |            |               |
|------------|------------|------------|---------------|-------------|------------|---------------|
|            | IN         | OUT        | Dren.         | IN          | OUT        | Dren.         |
| 040        | N13        | N13        | G14/U6        | -           | -          | -             |
| 060        | N13        | N13        | G14/U6        | -           | -          | -             |
| 080        | N13        | N13        | G14/U6        | -           | -          | -             |
| 110        | N19        | N13        | G14/U6        | N19         | N13        | G14/U6        |
| <b>140</b> | <b>N19</b> | <b>N13</b> | <b>G14/U6</b> | <b>N19</b>  | <b>N13</b> | <b>G14/U6</b> |
| 160        | N19        | N13        | G14/U6        | N19         | N13        | G14/U6        |
| 190        | N19        | N13        | G14/U6        | N19         | N13        | G14/U6        |
| 220        | N19        | N13        | G14/U6        | N19         | N13        | G14/U6        |
| 260        | N19        | N13        | G14/U6        | N19         | N13        | G14/U6        |
| 290        | N19        | N13        | G14/U6        | N19         | N13        | G14/U6        |
| 310        | N19        | N13        | G14/U6        | N19         | N13        | G14/U6        |

| Dimensione bocca |       |       |    |    |    |     |
|------------------|-------|-------|----|----|----|-----|
|                  | A (Ø) | B (Ø) | C  | D  | IN | OUT |
|                  | mm    | mm    |    | mm | Nm | Nm  |
| <b>N13</b>       | 13    | 30    | M6 | 15 | 8  | 8   |
| <b>N19</b>       | 19    | 40    | M8 | 15 | 15 | 15  |

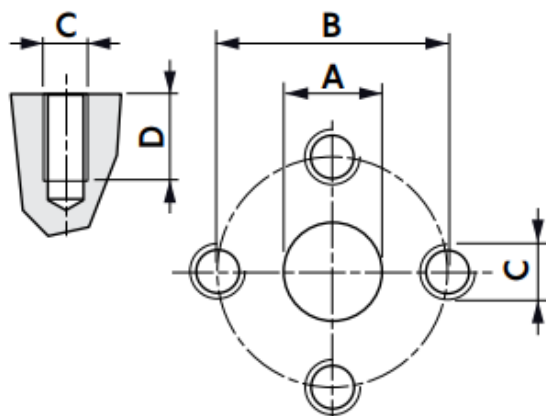

## Dimensioni totali

Flangia tipo EUR

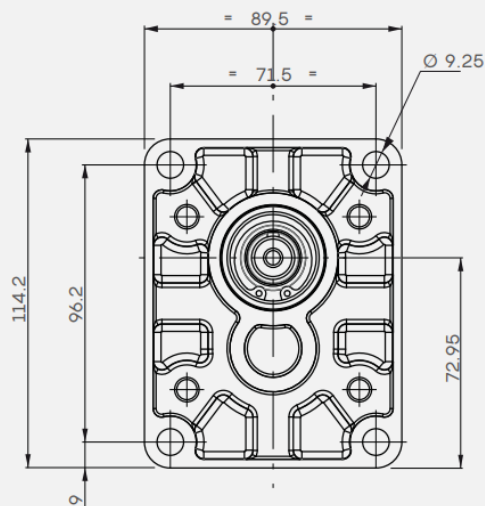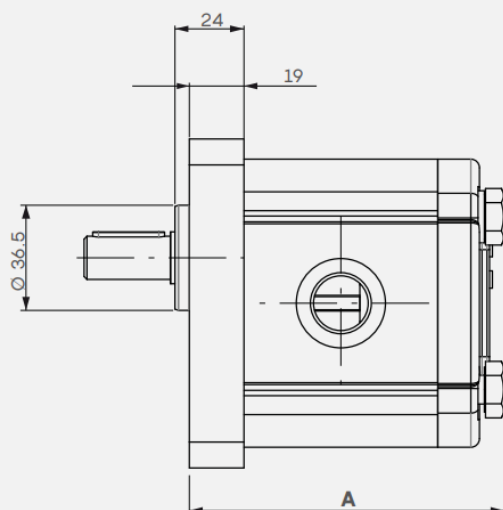

| Gruppo<br>2XP | A<br>mm |
|---------------|---------|
| 040           | 92.9    |
| 060           | 96.2    |
| 080           | 100.4   |
| 110           | 104.5   |
| 140           | 109.5   |
| 160           | 113.7   |
| 190           | 118.7   |
| 220           | 123.7   |
| 260           | 129.5   |
| 290           | 133.9   |
| 310           | 137.9   |