


1GP20012590

2XP-A-290-D-EUR-B-N-10-0-G34G12


2XP - A - 290 - D - EUR - B - N - 10 - 0 - G34G12

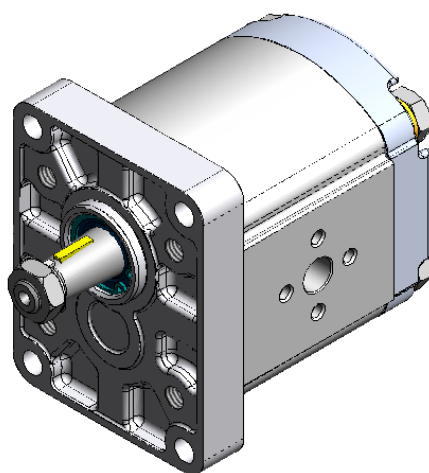


Corpo in alluminio

Tipo	Cilindrata cm ³ /giro	P1 Press. massima continua	P2 Press. massima intermittente	P3 Press. massima di picco	Velocità di rotazione	
		bar	bar	bar	max rpm	min rpm
2XP/2XM 040	4.1	250	270	290	4000	500
2XP/2XM 060	6.1	250	270	290	4000	500
2XP/2XM 080	8.7	250	270	290	3500	500
2XP/2XM 110	11.2	250	270	290	3500	500
2XP/2XM 140	14.2	250	270	290	3500	500
2XP/2XM 160	16.8	230	240	250	3500	500
2XP/2XM 190	19.8	210	220	230	3500	500
2XP/2XM 220	22.9	190	200	210	3000	500
2XP/2XM 260	26.4	170	180	190	3000	500
2XP/2XM 290	29.1	150	160	170	2500	500
2XP/2XM 310	31.5	130	140	150	2500	500


Pompe 2XP

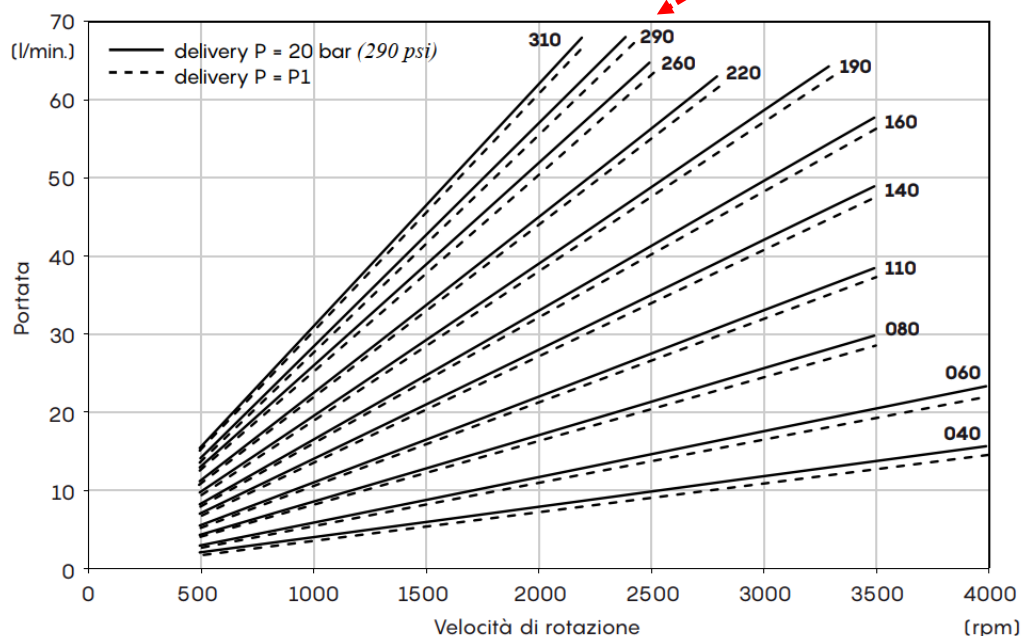


2XP 290

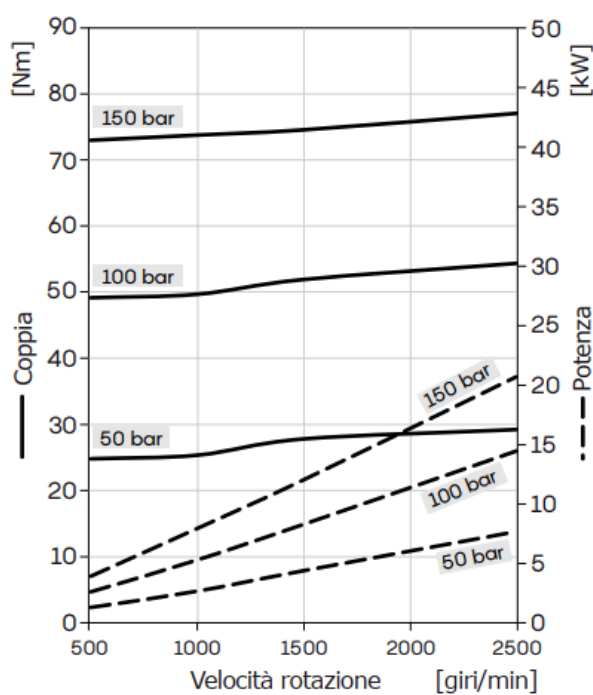

2XP - A - 290 - **D** - EUR - B - N - 10 - O - G34G12


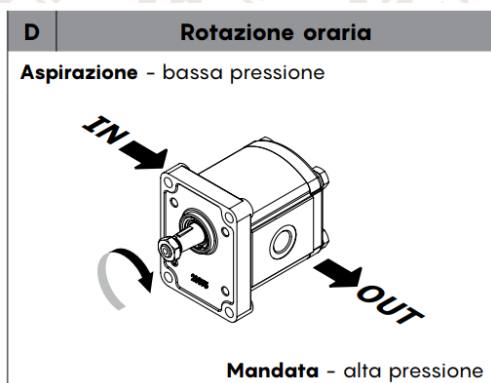


Unidirezionale



2XP - A - 290 - D - **EUR** - B - N - 10 - O - G34G12

Con paraoli: kit flangia standard
Esempio flangia EUR

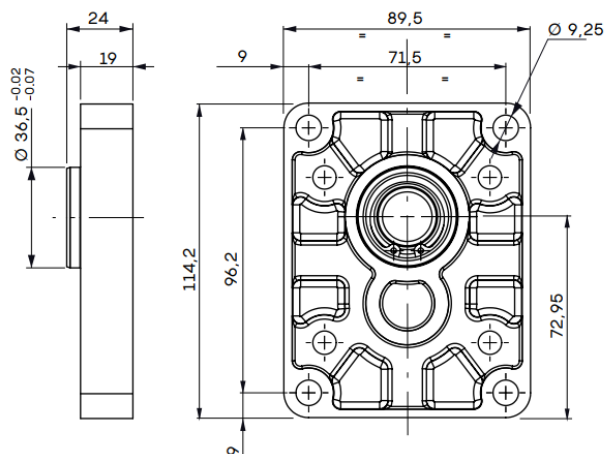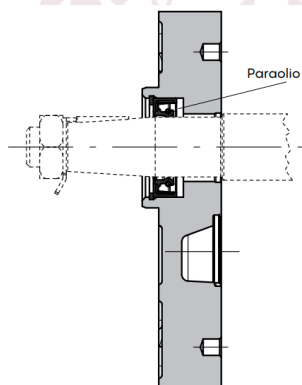


2XP - A - 290 - D - EUR - **B** - N - 10 - O - G34G12

Anello tenuta fino a 3 BAR a 1000 giri/min
(massima pressione sulla bocca di scarico/aspirazione)


2XP - A - 290 - D - EUR - B - **N** - 10 - 0 - G34G12

Guarnizioni NBR

2XP - A - 290 - D - EUR - B - N - **10** - 0 - G34G12

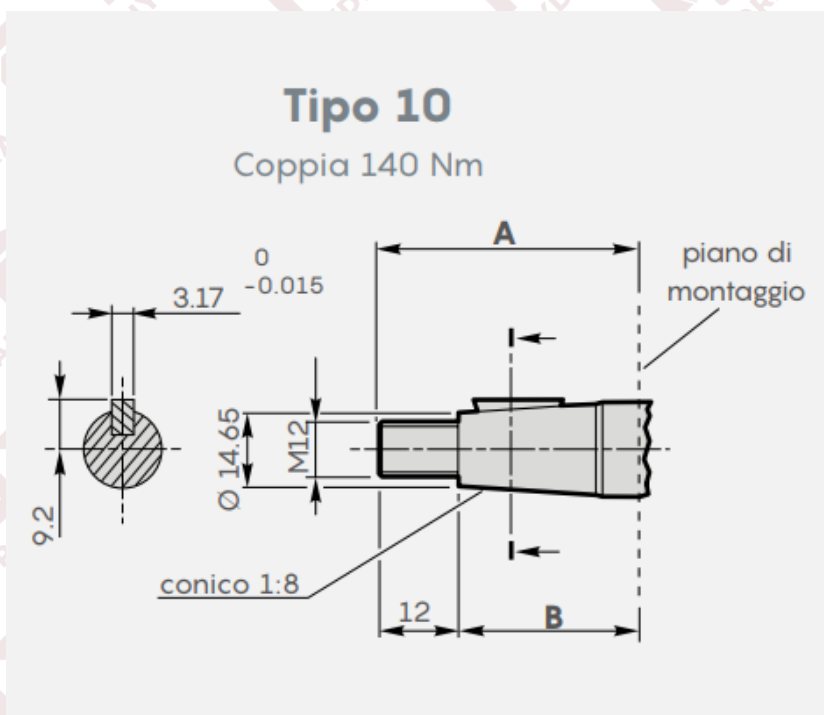

2XP - A - 290 - D - EUR - B - N - 10 - **0** - G34G12

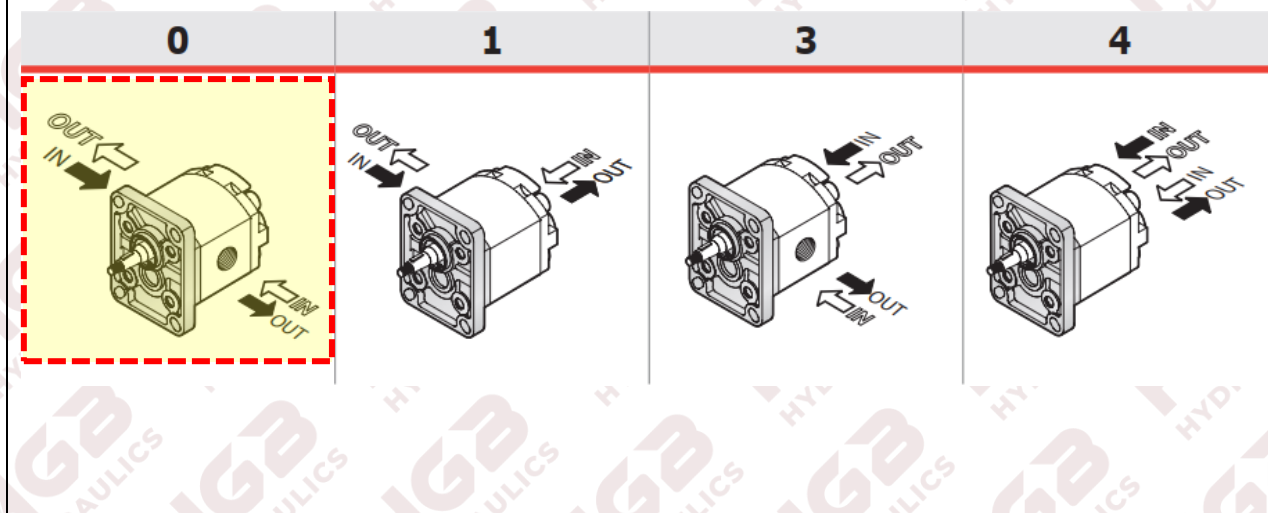


2XP - A - 290 - D - EUR - B - N - 10 - 0 - **C34G12**

Filettatura tipo G (BSP)

Cilindr..	Bocche laterali - Drenaggio posteriore					
	2XP / 2XM			2XPW / 2XMW		
	IN	OUT	Dren.	IN	OUT	Dren.
040	G12	G12	G14	-	-	G14
060	G12	G12	G14	-	-	G14
080	G12	G12	G14	-	-	G14
110	G34	G12	G14	G34	G12	G14
140	G34	G12	G14	G34	G12	G14
160	G34	G12	G14	G34	G12	G14
190	G34	G12	G14	G34	G12	G14
220	G1	G12	G14	G1	G12	G14
260	G1	G12	G14	G1	G12	G14
290	G1	G12	G14	G1	G12	G14
310	G1	G12	G14	G1	G12	G14



Dimensione bocca							
	A *	B	C (Ø)	D	IN	OUT	Dren.
		mm	mm	mm	Nm	Nm	Nm
G14	G 1/4"	13	21		-	-	15
G12	G 1/2"	16	31	0.5	20	50	-
G34	G 3/4"	18	36	0.5	30	90	-
G1	G 1"	20	45	0.5	50	130	-

(* filettatura secondo ISO 228/1)

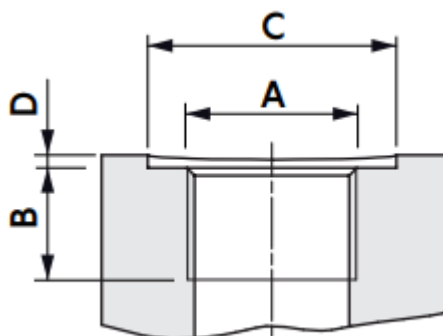

Dimensioni totali

Flangia tipo EUR

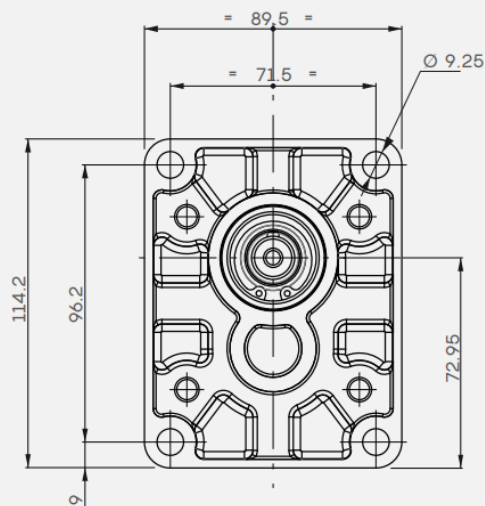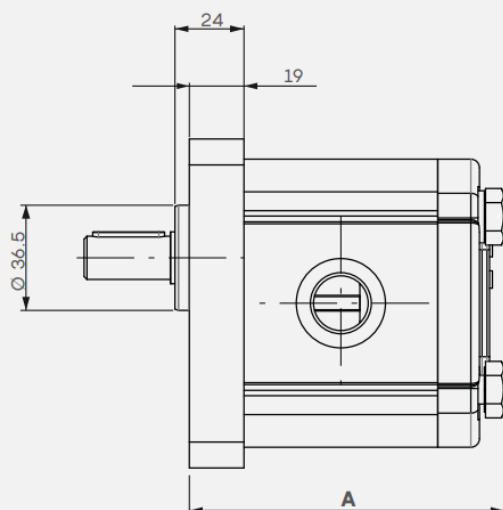

Gruppo 2XP

A
mm

040	92.9
060	96.2
080	100.4
110	104.5
140	109.5
160	113.7
190	118.7
220	123.7
260	129.5
290	133.9
310	137.9