



# 1GP10010241

## 1SP-A-042-D-EUR-B-N-10-0-G


**1SP - A - 042** - D - EUR - B - N - 10 - 0 - G

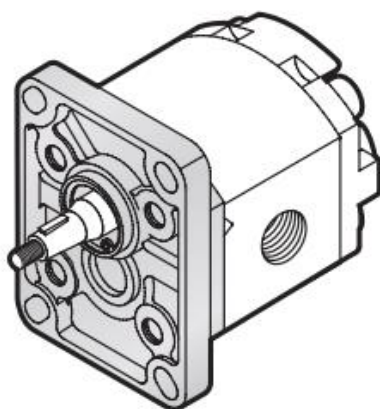


| GRUPPO<br>GROUP<br>1SP | CILINDRATA<br>DISPLACEMENT |         | PRESSIONE MAX - MAX PRESSURE |      |     |      |     |      | VELOCITÀ MAX<br>MAX SPEED | PORTATA MAX<br>MAX FLOW |         | VELOCITÀ MIN<br>MIN SPEED |
|------------------------|----------------------------|---------|------------------------------|------|-----|------|-----|------|---------------------------|-------------------------|---------|---------------------------|
|                        |                            |         | P1                           |      | P2  |      | P3  |      |                           |                         |         |                           |
|                        | cm³/giro                   | in³/rev | bar                          | psi  | bar | psi  | bar | psi  | giri/min - rpm            | l/min                   | Gal/min | giri/min - rpm            |
| 1SP 009                | 0.89                       | 0.05    | 260                          | 3770 | 280 | 4060 | 290 | 4205 | 6000                      | 5.3                     | 1.40    | 600                       |
| 1SP 012                | 1.18                       | 0.07    | 260                          | 3770 | 280 | 4060 | 290 | 4205 | 6000                      | 7.1                     | 1.88    | 600                       |
| 1SP 016                | 1.6                        | 0.10    | 260                          | 3770 | 280 | 4060 | 290 | 4205 | 6000                      | 9.6                     | 2.54    | 400                       |
| 1SP 020                | 2.0                        | 0.12    | 260                          | 3770 | 280 | 4060 | 290 | 4205 | 5500                      | 11                      | 2.91    | 400                       |
| 1SP 025                | 2.5                        | 0.15    | 260                          | 3770 | 280 | 4060 | 290 | 4205 | 5000                      | 12.5                    | 3.30    | 400                       |
| 1SP 032                | 3.2                        | 0.20    | 260                          | 3770 | 280 | 4060 | 290 | 4205 | 4500                      | 14.4                    | 3.80    | 400                       |
| 1SP 037                | 3.7                        | 0.23    | 250                          | 3625 | 270 | 3915 | 280 | 4060 | 4000                      | 14.8                    | 3.91    | 400                       |
| 1SP 042                | 4.2                        | 0.26    | 250                          | 3625 | 270 | 3915 | 280 | 4060 | 3500                      | 14.7                    | 3.88    | 400                       |
| 1SP 050                | 5.0                        | 0.31    | 250                          | 3625 | 270 | 3915 | 280 | 4060 | 3000                      | 15                      | 3.96    | 400                       |
| 1SP 063                | 6.3                        | 0.38    | 170                          | 2465 | 190 | 2755 | 210 | 3045 | 2700                      | 17                      | 4.49    | 400                       |
| 1SP 078                | 7.76                       | 0.47    | 170                          | 2465 | 190 | 2755 | 210 | 3045 | 2500                      | 19.4                    | 5.13    | 400                       |
| 1SP 098                | 9.78                       | 0.60    | 150                          | 2175 | 170 | 2465 | 190 | 2755 | 2000                      | 19.6                    | 5.18    | 400                       |

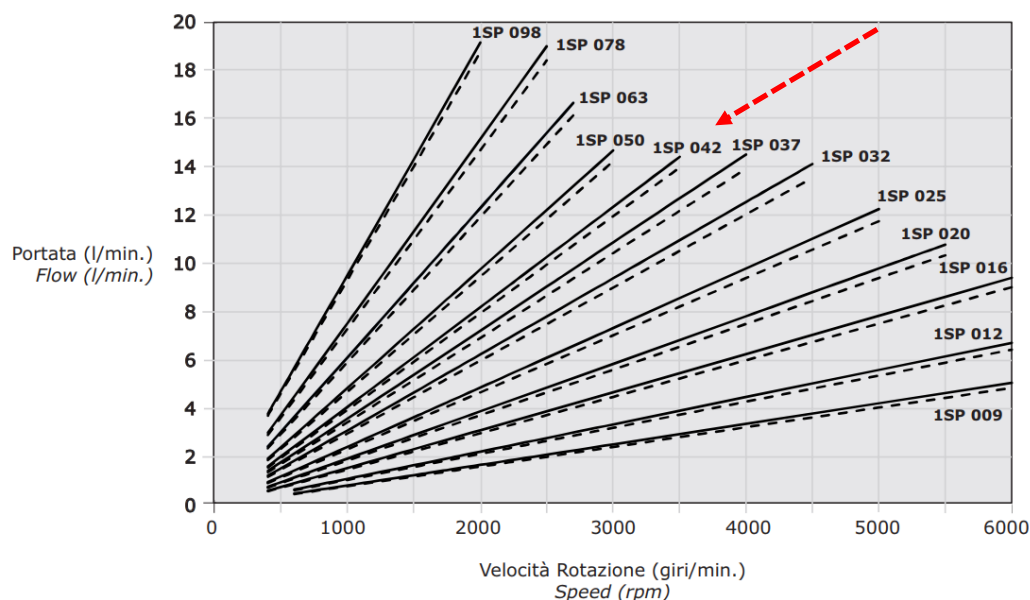


## 1SP 042

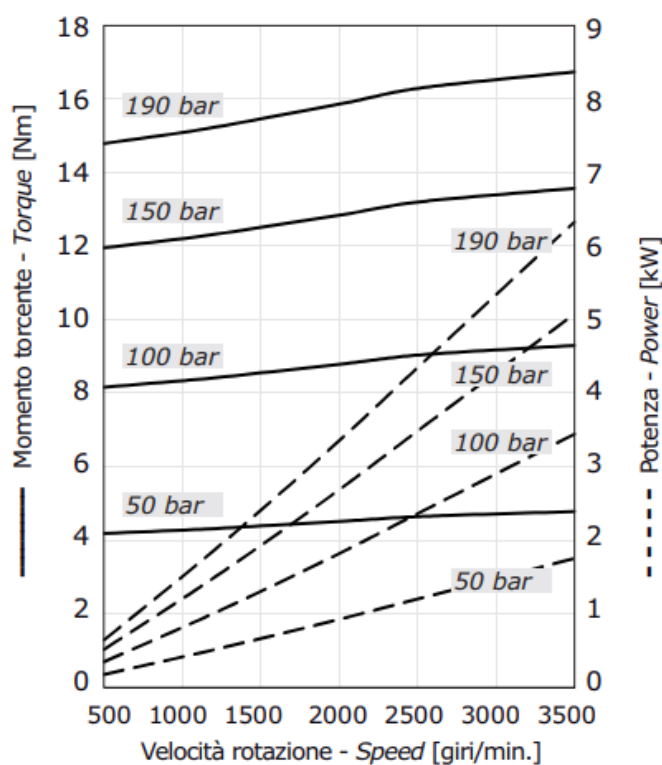

1SP - A - 042 - **D** - EUR - B - N - 10 - 0 - G

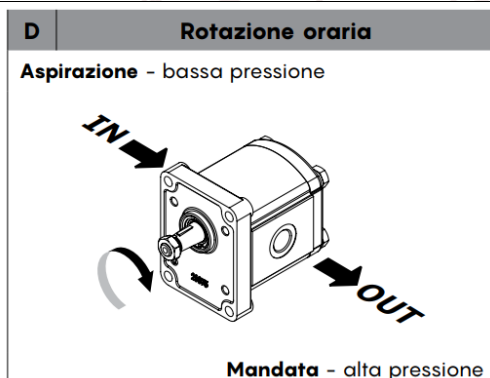


Unidirezionale



1SP - A - 042 - D - **EUR** - B - N - 10 - 0 - G

| GRUPPO - GROUP 1 | A     |       | B    |       | MASSA - MASS |      |
|------------------|-------|-------|------|-------|--------------|------|
|                  | mm    | inch  | mm   | inch  | kg           | lbs  |
| <b>1SP 012</b>   | 35.35 | 1.392 | 74.7 | 2.941 | 0.93         | 2.05 |

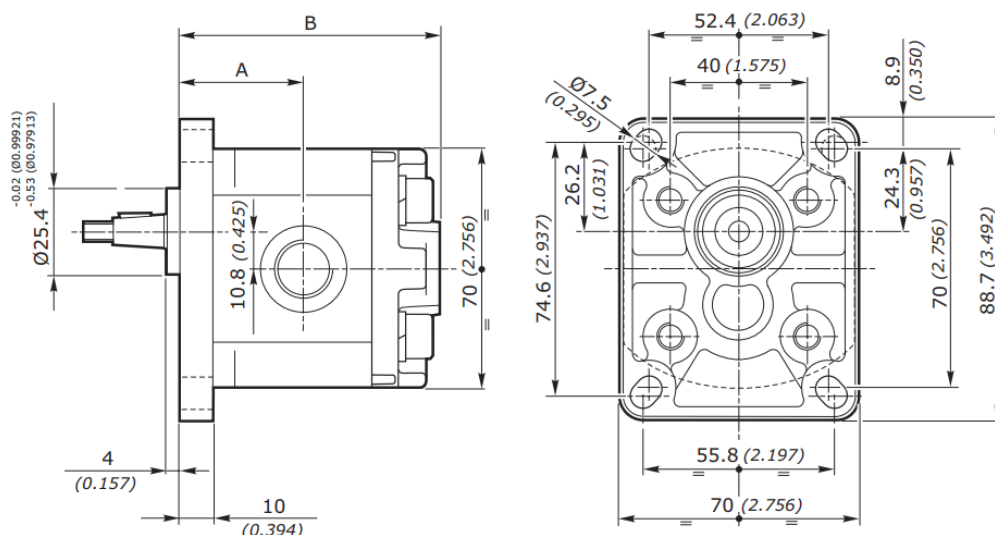

1SP - A - 042 - D - EUR - **B** - N - 10 - 0 - G

Anello tenuta fino a 3 BAR  
(massima pressione sulla bocca di scarico/aspirazione)

1SP - A - 042 - D - EUR - B - **N** - 10 - 0 - G


Guarnizioni NBR

ISP - A - 042 - D - EUR - B - N - **10** - 0 - G

**10**

Conico 1:8  
Tapered 1:8

Coppia 30 Nm  
Torque 22 ft-lbs

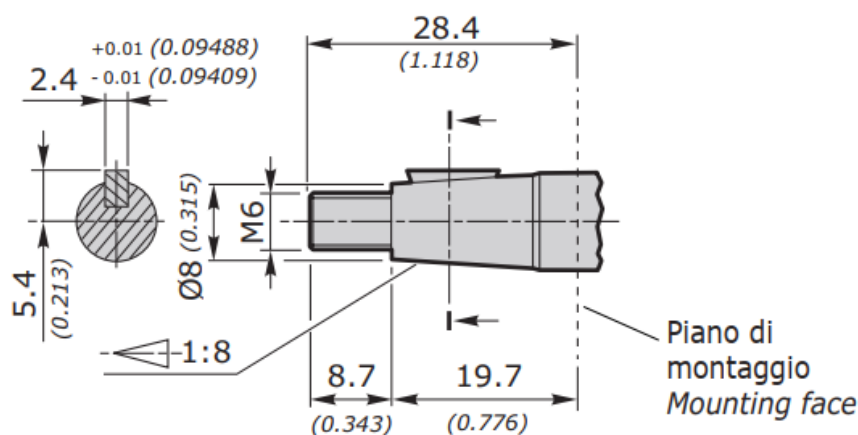

Disponibile per - available for: **EUR - MC32**





ISP - A - 042 - D - EUR - B - N - 10 - **0** - G

**0**

**1**

**3**

**4**



ISP - A - 042 - D - EUR - B - N - 10 - 0 - **G**

**GAS**

UNI ISO  
228/1

SIGLA  
CODE

CIL.  
DISPL.

ASPIRAZIONE - SUCTION **IN**

MANDATA - DELIVERY **OUT**

**A**


**B**

**IN**

**A**

**B**

**OUT**



**G**

009  
012  
016  
020  
025  
032  
037  
042  
050  
063  
078  
098

G 3/8"

14 [mm]  
0.552 [inch]


40 [Nm]  
354 [in.lbs]

G 3/8"

14 [mm]  
0.552 [inch]

40 [Nm]  
354 [in.lbs]

### Dimensioni totali

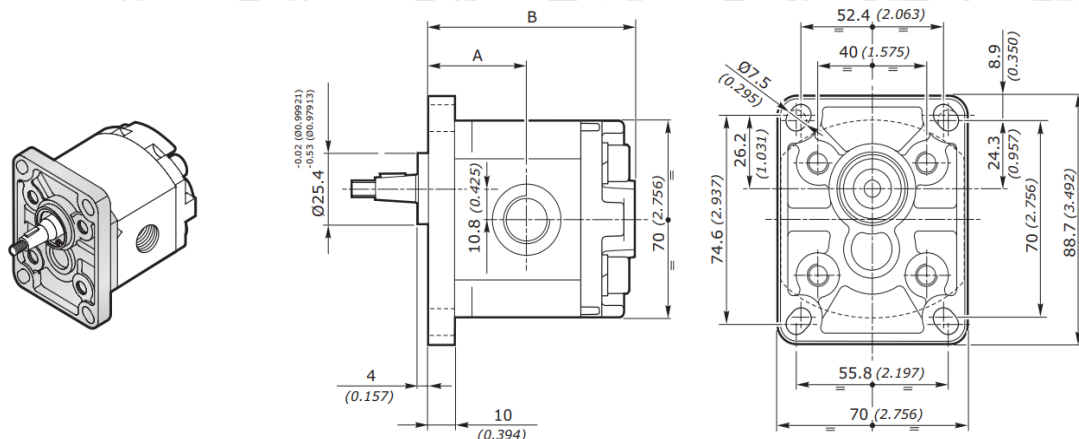

| GRUPPO - GROUP 1 | A     |       | B     |       | MASSA - MASS |      |
|------------------|-------|-------|-------|-------|--------------|------|
|                  | mm    | inch  | mm    | inch  | kg           | lbs  |
| <b>1SP 009</b>   | 34.80 | 1.370 | 73.6  | 2.898 | 0.91         | 2.01 |
| <b>1SP 012</b>   | 35.35 | 1.392 | 74.7  | 2.941 | 0.93         | 2.05 |
| <b>1SP 016</b>   | 36.20 | 1.425 | 76.4  | 3.008 | 0.95         | 2.09 |
| <b>1SP 020</b>   | 36.95 | 1.455 | 77.9  | 3.067 | 0.97         | 2.14 |
| <b>1SP 025</b>   | 37.95 | 1.494 | 79.9  | 3.146 | 1.00         | 2.21 |
| <b>1SP 032</b>   | 39.30 | 1.547 | 82.6  | 3.252 | 1.04         | 2.29 |
| <b>1SP 037</b>   | 40.30 | 1.587 | 84.6  | 3.331 | 1.07         | 2.36 |
| <b>1SP 042</b>   | 41.25 | 1.624 | 86.5  | 3.406 | 1.10         | 2.43 |
| <b>1SP 050</b>   | 42.80 | 1.685 | 89.6  | 3.528 | 1.14         | 2.51 |
| <b>1SP 063</b>   | 45.35 | 1.785 | 94.7  | 3.728 | 1.22         | 2.69 |
| <b>1SP 078</b>   | 48.20 | 1.898 | 100.4 | 3.953 | 1.30         | 2.87 |
| <b>1SP 098</b>   | 52.15 | 2.053 | 108.3 | 4.264 | 1.41         | 3.11 |